



3191 N. Washington. Suite 2  
 Chandler, AZ 85225  
 (480) 834-3411  
 DRAGONFIRERACING.COM

## Harness Mounting Brackets Kawasaki Teryx KRX 1000

Part # 14-4000

Kawasaki Teryx KRX 1000 (2 seat models)

Congratulations on your purchase of the DragonFire Racing Harness Brackets for Kawasaki Teryx KRX 1000. Designed to be simple, clean and strong, this is the only way to go. Be sure to check out the full line of DragonFire Accessories for your Kawasaki vehicle at your local authorized dealer or online at <http://www.DragonFireRacing.com>

**\*Note: Product fits two seat Teryx KRX 1000 models. This is the harness mounting brackets only and does not include harness restraints or the override plug\***



### WARNING

- Read and understand these instructions before installing product
- Do not use if there are signs of damage
- If roll over occurs inspect for damage and replace if needed
- Improper install may result in damage to roll cage
- Injury can result from rollover, use this product with caution


#### Tools Required

12mm Socket  
 13mm Socket  
 17mm Socket  
 5/8 Socket  
 Socket wrench  
 Flat Head screw driver  
 Phillips screw driver  
 Drill & 1" Hole Saw  
 Razor Knife or Dremel Tool  
 Tape Measure

#### Disclaimer

Off road activities can be hazardous and could lead to injury, dismemberment, paralysis and death. No warranty of representation is made as to the products ability to protect the user from any injury or death. The user assumes that risk. The acceptance and /or use of this merchandise purchased from DragonFire by the customer hereby shall release DragonFire from any and all liability pertaining to the use of such merchandise.

ITEM NO.	QTY	DESCRIPTION	STEP USED
P1	4	M8 - 1.25 X 30MM hex bolt	6
P2	4	M8 split lock washer	6
P3	4	M8 flat washer	6
P4	4	Spacer (Small)	6
P5	4	M12 x 1.25MM x 35MM flange hex bolt	7 & 12
P6	2	Spacer (Large)	12
P7	2	M12 flat washer	7
P8	4	7/16" SAE flat washer	10
P9	4	7/16-20 nyloc nut	10
P10	4	Eye bolt	10
P11	4	3 inch snap hook	10

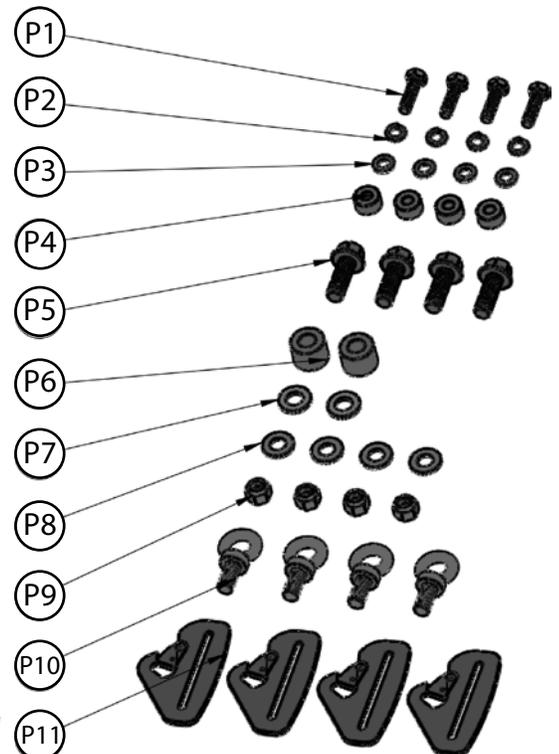

**BUILT TO REIGN**


**Step 1:** Place vehicle on a flat and level surface. Engage parking brake and remove key.

**Step 2:** Remove factory Kawasaki seats. Bottom cushions remove first to expose 4 hex bolts holding seat to the frame. Move seat forwards and back to easily access the bolts. **Figure-A**

**NOTE:** DO NOT remove Allen bolts from seat sliders.

**Step 3:** Remove top inner cage bolts from both passenger and driver side. **Figure-B**

**Step 4:** Remove three plastic lock pins on back intake cover. Remove cover. **Figure-C**

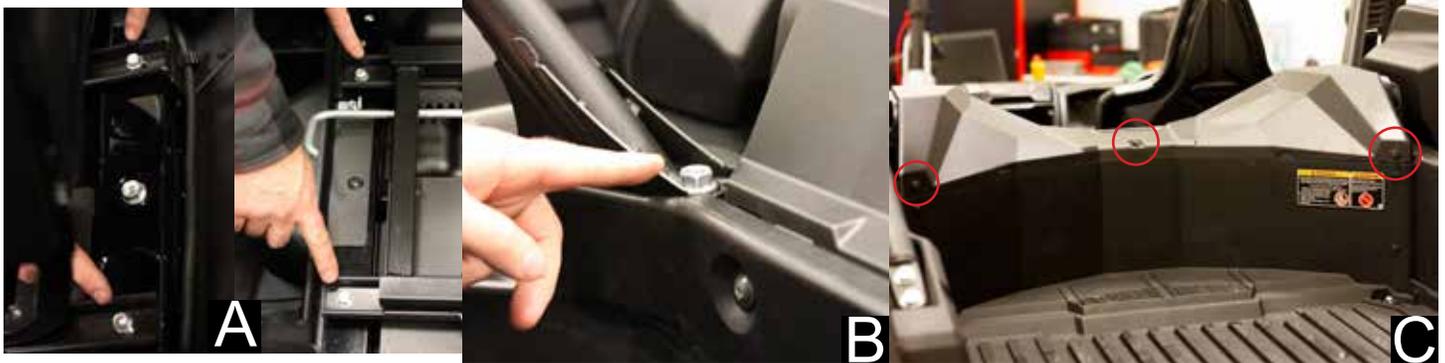

**Step 5:** Locate the 4 square plastic shapes located on the rear of the cockpit. **Figure-D**

Mark drill locations at 5/8" in from sides and down from the top of the square shape in plastic **Figure-E**

Using a 1in hole saw, cut through plastic ONLY. The hole should line up with a factory bolt hole. Pilot bit of hole saw will pass through the factory hole/nut. Pilot bit must not be larger than 1/4". **Figure-E & F**  
**DO NOT cut through metal frame.**



**Step 6:** Once you have the holes cut in the plastic you can start installing your harness brackets using provided hardware. You will need 2x P1 , 2x P2, 2x P3 , 2x P4. **Figure-G and Figure-H**

**Install Order:** bolt - lockwasher - flat washer - harness bracket - spacer - car

**Note:** Only tighten down until threads are started.

**Step 7:** Next you use the provided bolt to install the top of the harness bracket to the cage. You will need 1x P5 and 1x P7.

**Install Order:** bolt - bracket - washer - car

Torque the cage bolts to factory specs and M8 bolts to 29 ft lbs. Repeat step 6 & 7 for other side. **Figure-I**



**BUILT TO REIGN**

**Step 8:** Once you have the harness mounting brackets installed you will need to trim the rear plastic cover we removed on step 4 for the perfect fit. Using a silver sharpie mark the plastic cover as shown in **Figure-J** and carefully cut away any material that interferes with the harness mounting brackets using a sharp razor knife or dremel tool. Repeat step for opposite side.

**Step 9:** Replace factory plastic lock pins for rear plastic intake cover. **Figure-C**

**Step 10:** Install provided eye bolts on harness anchor brackets. You will need 2x P8, 2x P9 , 2x P10. **Figure-K**  
**Install Order: Eye bolt - harness mounting bracket - flat washer - nyloc nut**




**Step 11:** Now that you have your harness brackets installed you can remove your factory seat belts and install the harnesses. First you will remove the factory seat belts and **keep the outer lap mount bolts** for later. We provide two bolts and spacers for the inner lap-mounts.

**NOTE : IF INSTALLING DRAGONFIRE OVERRIDE PLUG #14-5001 (Sold Separately)**

After you have removed the factory seat belts you can now take off the center console in order to access the override plug. Remove 2 allen bolts on the back, the phillips bolt in the rear cup holder, **Figure-L** 2 phillips bolts by lap mount bolts and the 7 plastic lock pins. **Figure-M**  
Unclip the factory seat belt and replace with override plug install center console.

**Step 12:** Once you have replaced the center console you can install the lapmounts for the harnesses. Use the provided hardware P5 and P6 for the inner lap mounts **Figure-N** and the factory hardware for the outer lap mounts.  
**Inner Lap Mount Install Order: bolt - harness tab - spacer - chassis**

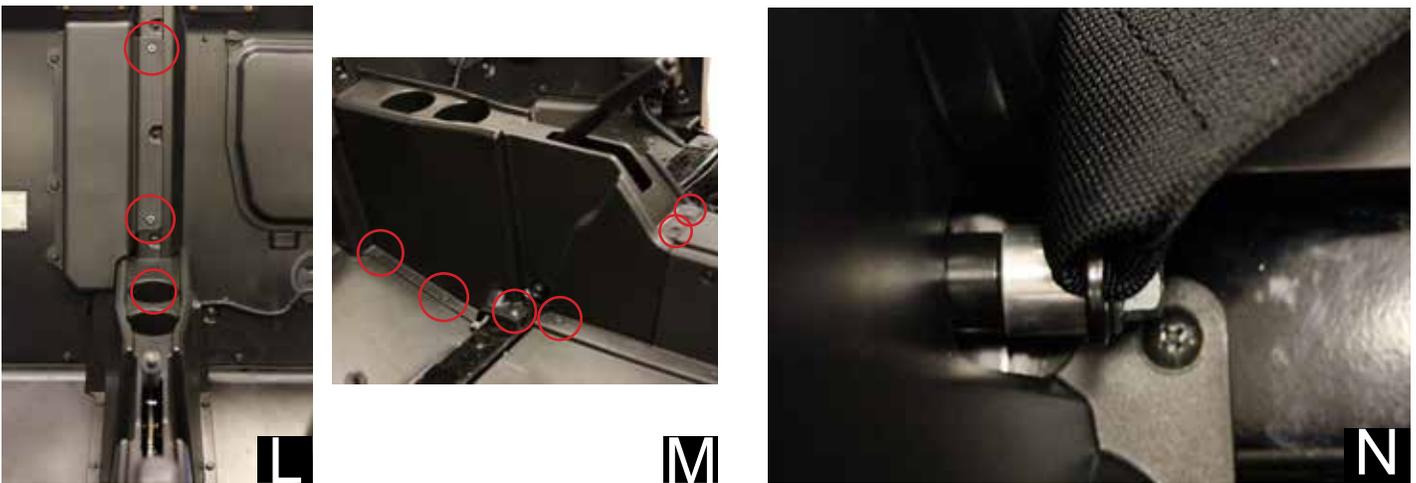

**Step 13:** Hook your quick release harness tabs to your harness mounting bracket eye bolts.

**Step 14:** Reinstall seats.

**Step 15:** Adjust harnesses for proper fit.

**Step 16:** Enjoy your DragonFire products.

**BUILT TO REIGN**